


Stationary WoodTainer Unloading



For fast and efficient **unloading of block trains with bulk cargo** Innofreight developed on the **WoodTainer** system. The Innofreight WoodTainer can be unloaded with **mobile equipment** (rotary unloading forklift) as well as with the **stationary WoodTainer unloading system**.

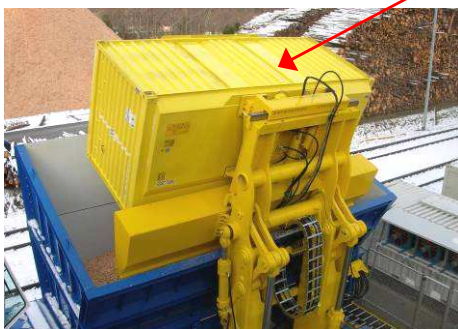

unloading
options



Technical Data - Stationary WoodTainer Unloading:

- ◆ Unloading performance: 23 WoodTainer/h (= 1,000m³/h or 500t/h).



One-person-operation by means of an electrical shunting robot and the WoodTainer unloading installation from an air-conditioned operation cabin.





Semiautomatic unloading cycle:



Positioning, lifting and emptying containers, afterwards placing back on the wagon.

Application possibilities:

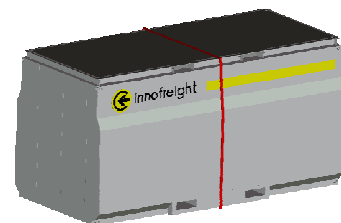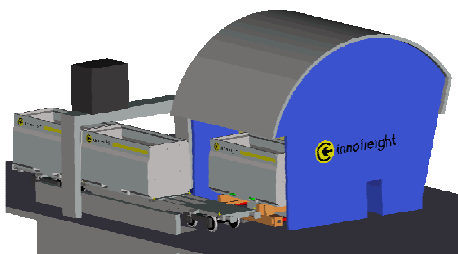

With a roof for biomass power plants, at high transport increase (e.g. in harbours), WoodTainer as an OT-Container but also for moisture-sensitive bulk cargo (with Hardtop).

Interested?

Contact: INNOFREIGHT Spedition GmbH, Grazer Straße 18, A-8600 Bruck an der Mur, Austria
Tel.: +43/3862/8989-240, Fax: -241. Mailto: office@innofreight.com, www.innofreight.com