



Page 1 of 18	Operating concept IW80ft Sggrrs	
Revision:12.00	BK-00011	BK - Operative Concept

Operating Concept IW80ft Sggrrs




	Function	Name	Date	Result
Version created	Modular Solutions	Lukas Geßelbauer	29.06.2023	
Reviewed	InnoWaggon GmbH	Peter Lackner	04.07.2023	Valid
Approved	Quality Management, Assurance, Control	Wolfgang Seidl	04.07.2023	Approved

Printouts are not subject to document control!


Page 2 of 18	Operating concept IW80ft Sgrrs	
Revision:12.00	BK-00011	GEßELBAUER, LUKAS

Contents	2
LIST OF FIGURES	3
LIST OF CHANGES	4
LIST OF ABBREVIATIONS	5
1 EXPLANATION OF ABBREVIATIONS	6
2 SCOPE OF APLICATION	7
3 MARKING OF THE UPPER STRUCTURE	7
4 PARTICULARITIES OF OPERATION	8
4.1 General	8
4.2 F1 qualification (acc. to EN12663-2) – summary from test report (Annex 6)	9
4.3 ISO-Container Transport	9
5 DAMAGE OF WAGON OR UPPER STRUCTURE	10
5.1 Reporting and processing of the wagon damage	10
5.2 Reporting and processing of upper structure damage	10
6 LIST OF ANNEXES	11
6.1 Annex 1 – Typeplan	11
6.2 Annex 2 – Additional wagon labels	12
6.3 Annex 3 – Examples of codification plates	15
6.4 Annex 4 – Stopper consoles	16
6.4.1 Checking the stopper consoles	17
6.5 Annex 5 – User Manual of IW80ft Sgrrs	17
6.6 Annex 6 – Cover sheet of test report on single wagon qualification of the upper structure	18

Page 3 of 18	Operating concept IW80ft Sggrrs	
Revision:12.00	BK-00011	GEßELBAUER, LUKAS


List of figures

Figure 1 Example of contact data from the wagon which took damage	10
Figure 2 Appendix 11, – Inscriptions and signs on wagons, 5.5	12
Figure 3 Appendix 11, – Inscriptions and signs on wagons, 2.13	12
Figure 4 Appendix 11, – Inscriptions and signs on wagons, 5.14	13
Figure 5 Appendix 11, – Inscriptions and signs on wagons, 4.4	13
Figure 6 EN15877-1:2012, – Marking on railway vehicles, 4.5.28	14
Figure 7 Example of yellow codification plate acc. UIC 596-6.....	15
Figure 8 Example of red codification plate acc. UIC 596-6	15
Figure 9 Mounted Stopper consoles.....	16
Figure 10 Stopper consoles – screw connection with wagon frame.....	16
Figure 11 Cover sheet – Single-wagon qualification	18

Page 4 of 18	Operating concept IW80ft Sggrs	
Revision:12.00	BK-00011	GESELBAUER, LUKAS


LIST OF CHANGES

Revision-number	Changes	Performed by	Date of change
<i>Rev 3.00</i>	<i>Typeplan change, V1.02</i>	LGE	<i>17.01.2022</i>
<i>Rev 4.00</i>	<i>Typeplan change, V1.03</i>	LGE	<i>15.02.2022</i>
<i>Rev 5.00</i>	<i>Typeplan change, V1.04</i>	LGE	<i>21.04.2022</i>
<i>Rev 6.00</i>	<i>Update – User manual</i>	LGE	<i>27.04.2022</i>
<i>Rev 7.00</i>	<i>Typeplan change – Variant Names updated</i>	LGE	<i>31.05.2022</i>
<i>Rev 8.00</i>	<i>Typeplan change – Layout & document name updated</i>	LGE	<i>14.07.2022</i>
<i>Rev 9.00</i>	<i>Update at point 3</i>	LGE	<i>29.12.2022</i>
<i>Rev 10.00</i>	<i>Update Point 2, 5; and Figure 1</i>	LGE	<i>22.02.2023</i>
<i>Rev. 11.00</i>	<i>General Update (Layout etc.)</i>	LGE	<i>14.03.2023</i>
<i>Rev 12.00</i>	<i>Update of Tara weight</i>	LGE	<i>29.06.2023</i>

Page 5 of 18	Operating concept IW80ft Sggrs	
Revision:12.00	BK-00011	GESELBAUER, LUKAS

LIST OF ABBREVIATIONS

Abbreviations	Long form
IW	InnoWaggon
UIC	International union of railways
HLL	Main air pipe / Hauptluftleitung
HBL	Main pipe of air reservoir / Hauptluftbehälterleitung
TEN	Transeuropean net
TSI	Technical specification interoperability
G1, GE, ...	Boundary lines according to TSI

Page 6 of 18	Operating concept IW80ft Sggrs	
Revision:12.00	BK-00011	GESELBAUER, LUKAS

1 EXPLANATION OF ABBREVIATIONS

IW (InnoWaggon)

Innovative freight wagon that can transport different goods with different upper structures. The upper structures are mounted by UIC carrying pins or connected to the wagon via screw system (e.g., stanchion systems).

ECM

„Entity in Charge of Maintenance” – entity responsible for maintenance

Tare weight (Own weight)

IF upper structures and intermodal loading units are always included in the tare weight of the wagon. (ISO containers are not included in the tare weight).

Loose wagon parts:

Upper structures of the wagon

Loading limits grid / Track limits grid:

Display for the maximum possible load weight depending on route class and speed.

Loading limits / Track limits:

The load limits are labelled on the wagon. The relevant load limit is determined by the lowest route class on the transport route and may therefore not be exceeded.

Combined transport (CT) (Kombinierter Ladungsverkehr (KV)):

In CT, codified intermodal loading units (ILU) are carried on special wagons on special tested and approved routes in trains with a max. profile number. All intermodal loading units are codified according to UIC Leaflet 596-6. This codification ensures compatibility with the profiles permitted on the CT routes.

TSI-License owner:


InnoWaggon GmbH, Grazer Straße 11, 8600 Bruck an der Mur, Austria is the legal owner of the TSI license and all documents required for the license.

Loaded wagon:

The wagon is considered loaded as soon as an upper structure or another intermodal loading unit is placed or mounted, regardless of the loading status (loaded/unloaded) of the upper structure or the intermodal loading unit.

TVP:

Tatravagonka Poprad

Page 7 of 18	Operating concept IW80ft Sgrrs	
Revision:12.00	BK-00011	GEßELBAUER, LUKAS

2 SCOPE OF APPLICATION

The aim of this document is to regulate the safe use of the wagon in combination with the upper structures (configurations according to the type plan).

The operating concept refers to the operation of the wagon in the TEN GE (Trans European Network) for all the following wagon units, which are noted on the currently valid type plan.

The operating concept refers to the operation of the InnoWaggon Sgrrs 80ft vehicle (XX XX 4854 XXX-X) in TEN.

3 MARKING OF THE UPPER STRUCTURE

Depending on the configuration variant, the upper structures are equipped with yellow (internationally approved, UIC compliant), or red codification plates (nationally approved, not UIC compliant in all features, approval bi-/multilaterally agreed).

The following types of upper structures do not require a codification plate:

- The upper structure of the whole class „A“ Variants
- The upper structure of the whole class „B“ Variants
- The Variant „F01“
- The Variant „D09 & D16“
- The Variant „D14“
- The Variant „E01 & E03“
- The Variant „F03“


Variants with red codification labels:

- may be transported as an exceptional delivery **or**

the approved authorities/EVU are:

- listed next to the code license plate in the separate agreement grid, **or**
- listed in the associated loading example, where its number is indicated in the code license plate.

The profile number specified in the codification plate (e.g., C45) indicates which KV profile is applied.

Page 8 of 18	Operating concept IW80ft Sggrs	
Revision:12.00	BK-00011	GESELBAUER, LUKAS

4 PARTICULARITIES OF OPERATION

4.1 General

The wagon has an approval according to TSI with the address TEN GE or CW. The associated approval document requires that the wagon is only permitted to operate with at least one loose wagon component per wagon half.

In respect to fulfill the requirements, the upper structures are marked as loose wagon components with the international inscription for loose wagon components (Annex 2 – Additional wagon labels).

According to EN 16235, a minimum weight for 4-axle freight wagons of 4 tons per axle is required.

Due to the tare weight of approx. 14,85 tons per wagon element, the wagon must always operate with all upper structures (containers, pallets, stanchion systems) marked on the wagon.


If a loose wagon component is missing, it must be replaced; if this is not possible, the wagon must be suspended.

Chapter 6.1.7.7 of Annex 9 of the GCU (AVV) must not be applied.

The exchange of the upper structures from one variant to another is only allowed to be carried out by trained and authorized personal. The training and authorization in respect of the required personal must be carried out by the ECM, or the TSI license holder.

The transport of new configuration variants which are not shown on the type plan or which deviate from the type plan is not permitted without the approval of the TSI license holder. The transport of ISO containers is excluded.

Wagons operate according to the provisions of UIC loading guideline volume 1, section 1.1, the wagons of combined transport listed on the right half page and the resulting transport requirements in section 1.3.

Page 9 of 18	Operating concept IW80ft Sggrs	
Revision:12.00	BK-00011	GEßELBAUER, LUKAS

4.2 F1 qualification (acc. to EN12663-2) – summary from test report (Annex 6)

The corresponding wagon is generally suitable for rolling or pushing in single wagon traffic.

Innofreight, as owner of the upper structures, authorizes the respective RU (EVU) to release the rolling and pushing prohibition for wagons from this scope and the specified upper structures and overtakes responsibility for the upper structures.

The following types of upper structure (variants) in combination with the wagon are suitable for rolling off or pushing off in single wagon traffic:


- Types of Group „A“ – Pallets
- Types of Group „B“ – Stanchion systems
- Types of Group „C“ – Container with pneumatical functions (e.g., RockTainers)
- All upper structures where the longitudinal forces are transferred to the stopper consoles during transport.

For the above-mentioned groups of upper structures, the wagon inscription (Annex 6 – Cover sheet of test report on single wagon qualification of the upper structure) - signs for the prohibition of pushing off and running off - is not valid or, if necessary, must be covered.

4.3 ISO-Container Transport

Special rules for ISO containers are specified for the following variants:

- Variant "D14, BoxOnBox": Wagon halves that can be loaded with ISO containers are never allowed to operate without ISO containers.
- Variant "E02, ISO Container": Wagon halves that can be loaded with ISO containers are only allowed to operate without ISO containers if the specified ballast plates are mounted.

Page 10 of 18	Operating concept IW80ft Sggrs	
Revision:12.00	BK-00011	GEßELBAUER, LUKAS

5 DAMAGE OF WAGON OR UPPER STRUCTURE

5.1 Reporting and processing of the wagon damage

In case of any damage to the wagon during the operation, the wagon keeper marked on the wagon must be informed.

The corresponding contact address of the wagon keeper can be found on the website:
<http://www.gcubureau.org/welcome> (search for the contracting party).

All wagon repairs are allowed to be carried out only by authorized workshops. The type of repair work has to be decided by the wagon keeper in agreement with the responsible ECM in according to the GCU (AVV).

For example:

1. DE_Details of GCU contact

Rail Cargo Wagon - Austria GmbH
Halter
Österreich
Am Hauptbahnhof 2
Wien
1100
Österreich
ATU51274106
01. 07. 2006.

Figure 1 Example of contact data from the wagon which took damage

5.2 Reporting and processing of upper structure damage

If damage to the upper structure is caused during operation of the wagon, the Innofreight damage hotline must be informed immediately.


Innofreight - Damage hotline (Schadenshotline)

Email: support@innofreight.com

Phone: +43 / 3862 8989 242

Fax: +43 / 3862 8989 241

All repairs to loose wagon components are only allowed to be carried out by authorized and trained workshops. The type of repair work has to be decided by the Innofreight claims hotline.

Page 11 of 18	Operating concept IW80ft Sgrrs	
Revision:12.00	BK-00011	GEßELBAUER, LUKAS

6 LIST OF ANNEXES

- Anlage 1 – Typeplan
- Anlage 2 – Additional Wagon labels
- Anlage 3 – Examples of codification plates
- Anlage 4 – Stopper consoles
- Anlage 5 – User manual InnoWaggon IW80ft Sgrrs
- Anlage 6 – Test report on single-wagon qualification of the upper structure

6.1 Annex 1 – Typeplan


The type plan is a separate document.

Document name: Type plan IW80ft Sgrrs

The reference of the type plan is always corresponding to the latest and valid version.

6.2 Annex 2 – Additional wagon labels

5.5 Sign for wagons that must not be fly- or gravity-shunted

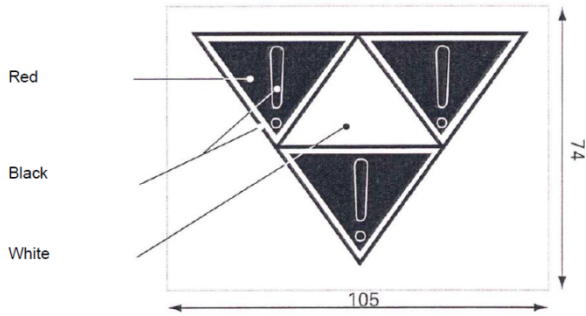

Position: On the left of each solebar, or on parts covering the solebar or on special boards fitted at the same height as the solebars.

Meaning: Wagon


- must not be fly- or gravity-shunted,
- must be marshalled by a motive power unit,
- must not be loose-shunted and must be protected against buffing by other rolling stock.

N.B.: Point 5.3.4.1 of the RID states that in place of the shunting label (shown in model 15) the wagon may instead carry permanent shunting signs (wagon markings) providing they conform precisely to the prescribed example.

Figure 2 Appendix 11, – Inscriptions and signs on wagons, 5.5

2.13 Sign for removable wagon accessories

Removable wagon accessories

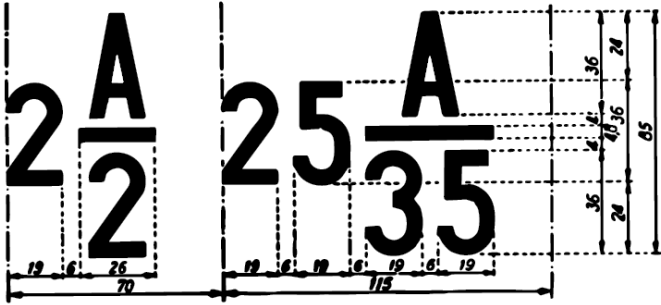

Position: On the right of each side wall.

Meaning: The number and type of removable accessories are to be indicated. In the case of carboy wagons and wagons with removable recipients, the number of such recipients should be indicated. The figure placed before the fraction indicates the number of removable accessories belonging to the wagon; the letter "A" indicates that the accessories are removable, and the denominator of the fraction gives the serial number assigned to the removable accessory in the list below. The names of the accessories may also be added in letters alongside these signs.

Figure 3 Appendix 11, – Inscriptions and signs on wagons, 2.13

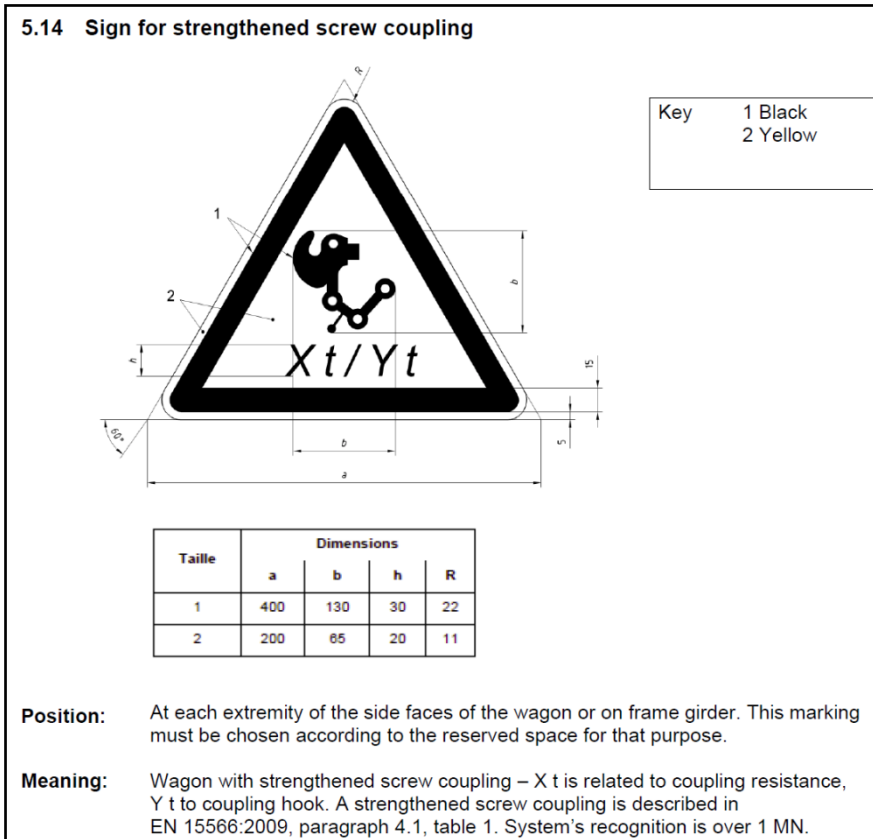


Figure 4 Appendix 11, – Inscriptions and signs on wagons, 5.14

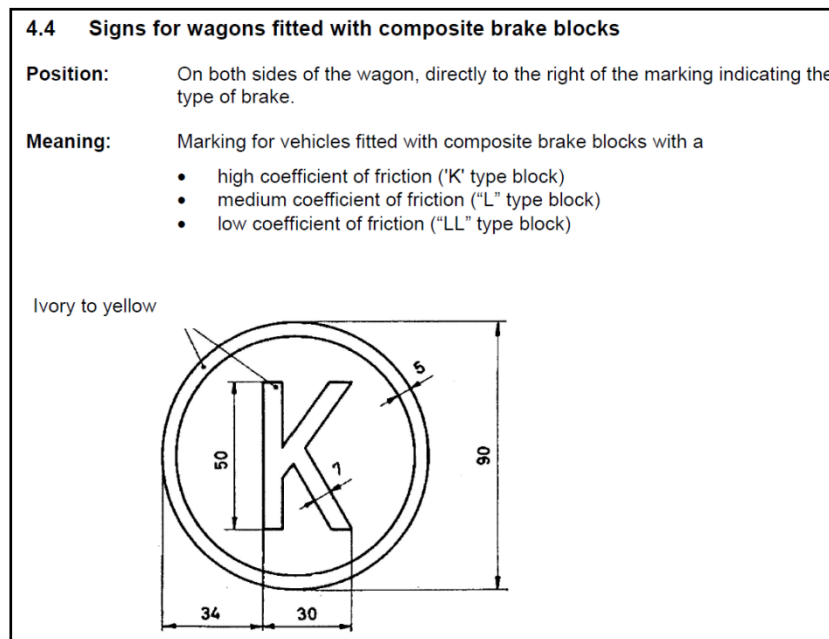



Figure 5 Appendix 11, – Inscriptions and signs on wagons, 4.4

Page 14 of 18	Operating concept IW80ft Sggrs	
Revision:12.00	BK-00011	GEßELBAUER, LUKAS

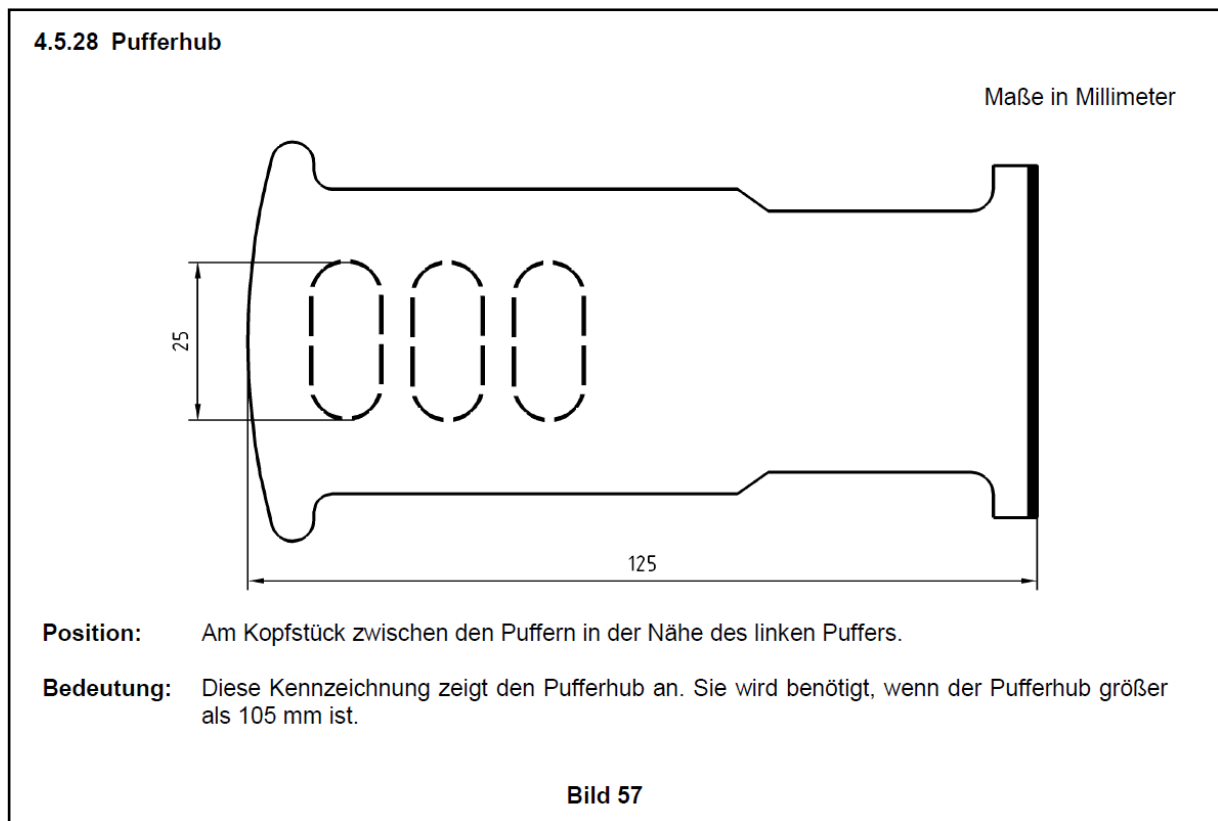


Figure 6 EN15877-1:2012, – Marking on railway vehicles, 4.5.28

The information of buffer stroke greater than 105mm has to be written on the wagon only when using Cat. - L buffers.

6.3 Annex 3 – Examples of codification plates

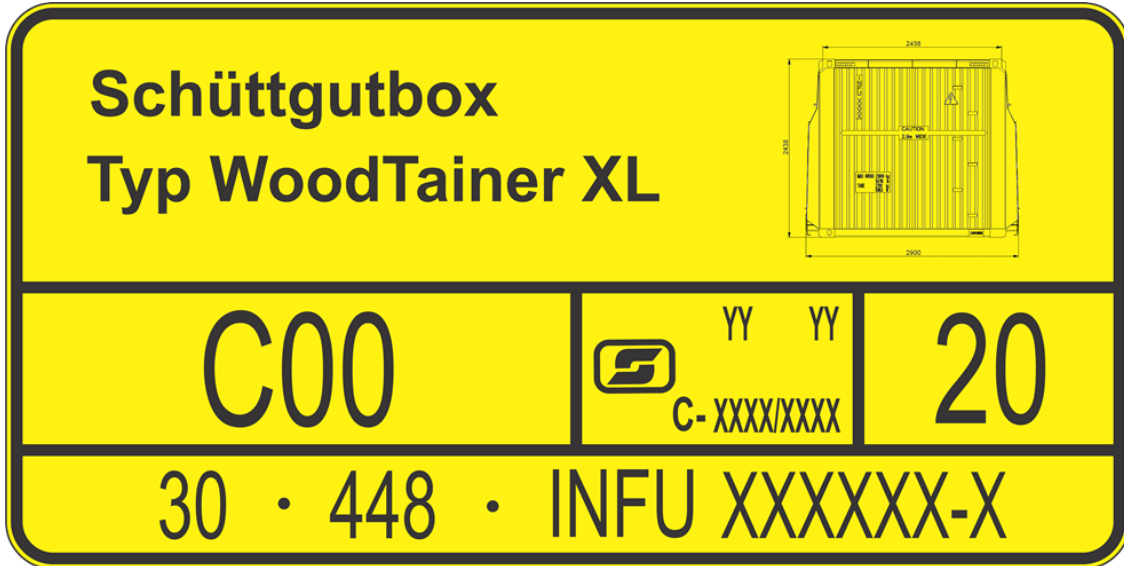


Figure 7 Example of yellow codification plate acc. UIC 596-6

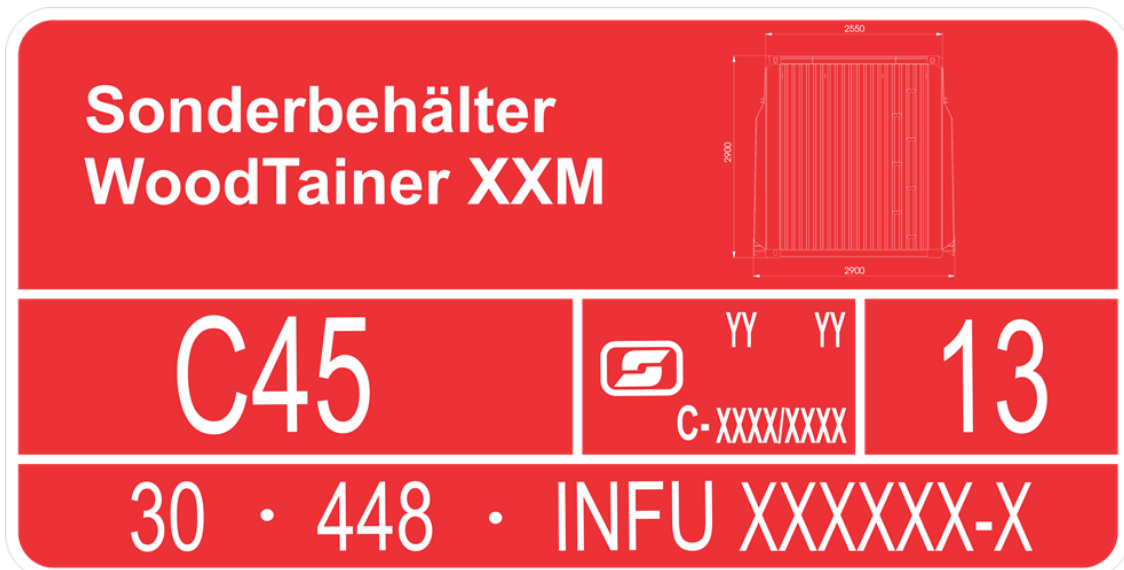



Figure 8 Example of red codification plate acc. UIC 596-6

Page 16 of 18	<p style="text-align: center;">Operating concept IW80ft Sgrrs</p>	
Revision:12.00	BK-00011	GESELBAUER, LUKAS

6.4 Annex 4 – Stopper consoles

The stopper consoles are used to transfer the longitudinal forces to the wagon frame during transport of heavy-duty goods respective of the upper structures.



Figure 9 Mounted Stopper consoles

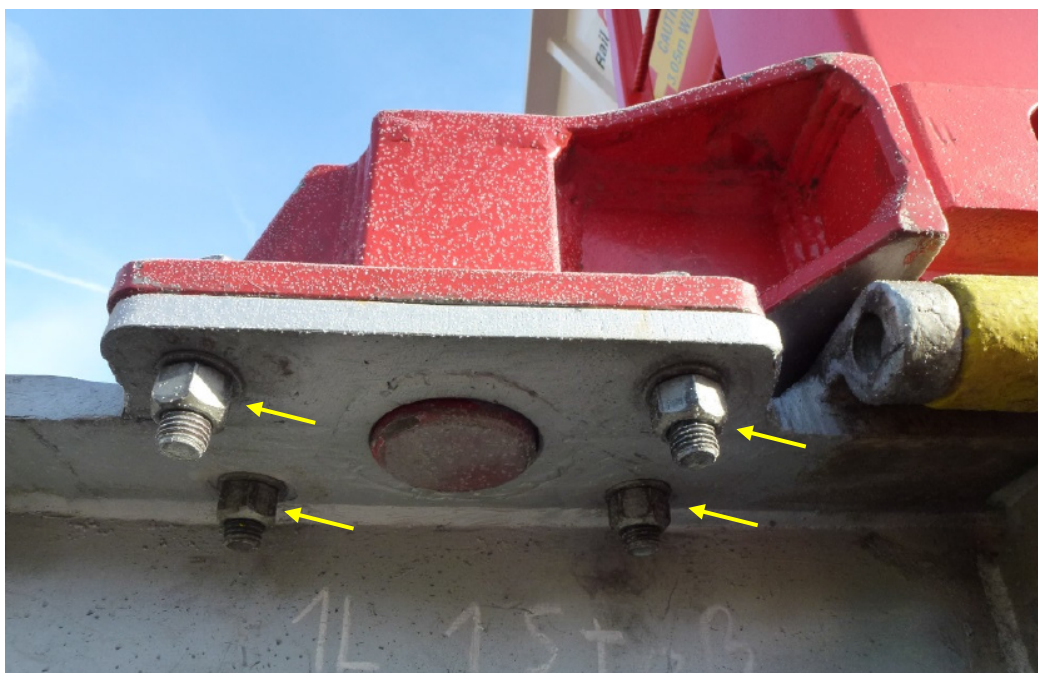



Figure 10 Stopper consoles – screw connection with wagon frame

Page 17 of 18	Operating concept IW80ft Sgrrs	
Revision:12.00	BK-00011	GEßELBAUER, LUKAS

6.4.1 Checking the stopper consoles

The following points must be checked as part of a wagon inspection or when necessary:

- **Stopper console**
The stopper console must be checked if plastic deformation and/+or damage is present. A visual inspection is enough for this purpose.
- **Screw connection**
The tightening torque of the screw connection used for mounting the stopper consoles must be checked with a suitable measuring instrument (calibrated torque wrench)!

Note:


For the assembly of the stop brackets, screw connections of the type M20x80 8.8 with a tightening torque of 420Nm or M20x80 10.9 with a tightening torque of 590Nm as well as self-locking nuts must be used.

6.5 Annex 5 – User Manual of IW80ft Sgrrs

The user manual of the basic part and the corresponding appendices described in the type plan are separate documents.

Document name: User Manual Basic Part IW80ft Sgrrs

The reference to the user manual is always corresponding to the latest and valid version.

Page 18 of 18	Operating concept IW80ft Sggrs	
Revision:12.00	BK-00011	GESELBAUER, LUKAS

6.6 Annex 6 – Cover sheet of test report on single wagon qualification of the upper structure

Seite 1 von 98	BERICHT																						
<p><u>INNOFREIGHT –</u></p> <p><u>SCHWERLASTAUFBAUTEN -</u></p> <p><u>EINZELWAGENTAUGLICHKEIT</u></p>																							
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%;">Verfasser: Richard Schanner</td> <td style="width: 33%;">Erstelldatum: 15.12.2020</td> <td style="width: 33%;"></td> </tr> <tr> <td>Email: richard.schanner@innofreight.com</td> <td>Telefon Nr.: +43-676 845 780 760</td> <td></td> </tr> <tr> <td>Technischer Prüfer: DI Peter Wanek-Pusset</td> <td>Prüfdatum: 16.12.2020</td> <td></td> </tr> <tr> <td>Email: peter.wanek-pusset@innofreight.com</td> <td>Telefon Nr.: +43-676 845 780 800</td> <td></td> </tr> <tr> <td>Freigabe: DI Peter Wanek-Pusset</td> <td>Datum:</td> <td></td> </tr> <tr> <td>Email: peter.wanek-pusset@innofreight.com</td> <td>Telefon Nr.:</td> <td></td> </tr> <tr> <td>Verteiler:</td> <td></td> <td></td> </tr> </table>			Verfasser: Richard Schanner	Erstelldatum: 15.12.2020		Email: richard.schanner@innofreight.com	Telefon Nr.: +43-676 845 780 760		Technischer Prüfer: DI Peter Wanek-Pusset	Prüfdatum: 16.12.2020		Email: peter.wanek-pusset@innofreight.com	Telefon Nr.: +43-676 845 780 800		Freigabe: DI Peter Wanek-Pusset	Datum:		Email: peter.wanek-pusset@innofreight.com	Telefon Nr.:		Verteiler:		
Verfasser: Richard Schanner	Erstelldatum: 15.12.2020																						
Email: richard.schanner@innofreight.com	Telefon Nr.: +43-676 845 780 760																						
Technischer Prüfer: DI Peter Wanek-Pusset	Prüfdatum: 16.12.2020																						
Email: peter.wanek-pusset@innofreight.com	Telefon Nr.: +43-676 845 780 800																						
Freigabe: DI Peter Wanek-Pusset	Datum:																						
Email: peter.wanek-pusset@innofreight.com	Telefon Nr.:																						
Verteiler:																							

Figure 11 Cover sheet – Single-wagon qualification